



Technical

curve STYLES

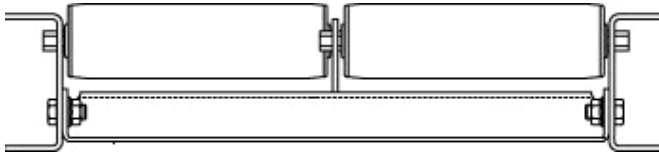


STRAIGHT FACE ROLLERS are recommended where packages of uniform size are conveyed and rubbing against guards is not objectionable.

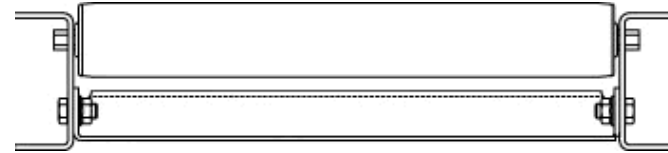

DIFFERENTIAL ROLLERS offer reduced package swerve. Package travels more easily. Guard rails should be used.

TAPERED ROLLERS are recommended above all others because of their improved carrying surface. They hold the package in relatively the same position through the entire curve.

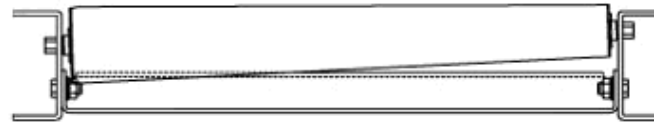

NOTE: Orientation of product may be affected when using straight rollers in curve. If orientation of product must be maintained, a tapered roller curve should be used. Consult factory.